

General Description

SFGMOS[®]

low

$R_{DS(ON)}$, low gate charge, fast switching and excellent avalanche characteristics. The low V_{th} series is specially designed to use in synchronous rectification power systems with low driving voltage.

Features

- Low $R_{DS(ON)}$ & FOM
- Extremely low switching loss
- Excellent reliability and uniformity
- Fast switching and soft recovery



Applications

- PD charger
- Motor driver
- Switching voltage regulator
- DC-DC convertor
- Switched mode power supply


Key Performance Parameters

Parameter	Value	Unit
$V_{DS, min} @ T_{j(max)}$	100	V
$I_D, pulse$	300	A
$R_{DS(ON) max} @ V_{GS}=10V$	7	
Q_g	60.7	nC

Marking Information

Product Name	Package	Marking
SFG10R08GF	PDFN5*6	SFG10R08G

Package & Pin information

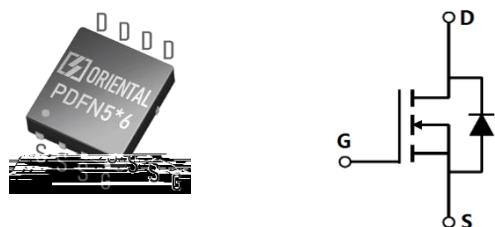

Absolute Maximum Ratings at $T_j=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Value	Unit
Drain source voltage	V_{DS}	100	V
Gate source voltage	V_{GS}	± 20	V
Continuous drain current ¹⁾ , $T_C=25^\circ\text{C}$	I_D	100	A
Pulsed drain current ²⁾ , $T_C=25^\circ\text{C}$	$I_{D,\text{pulse}}$	300	A
Continuous diode forward current ¹⁾ , $T_C=25^\circ\text{C}$	I_S	100	A
Diode pulsed current ²⁾ , $T_C=25^\circ\text{C}$	$I_{S,\text{Pulse}}$	300	A
Power dissipation ³⁾ , $T_C=25^\circ\text{C}$	P_D	148	W
Single pulsed avalanche energy ⁵⁾	E_{AS}	130	mJ
Operation and storage temperature	T_{stg}, T_j	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Value	Unit
Thermal resistance, junction-case	R	0.84	$^\circ\text{C}/\text{W}$
Thermal resistance, junction-ambient ⁴⁾	R	62	$^\circ\text{C}/\text{W}$

Electrical Characteristics at $T_j=25^\circ\text{C}$ unless otherwise specified

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Drain-source breakdown voltage	BV_{DSS}	100			V	$V_{GS}=0 \text{ V}, I_D=250 \text{ A}$
Gate threshold voltage	$V_{GS(\text{th})}$	1.0		2.5	V	$V_{DS}=V_{GS}, I_D=250 \text{ A}$
Drain-source on-state resistance	$R_{DS(\text{ON})}$		5.8	7.0		$V_{GS}=10 \text{ V}, I_D=12 \text{ A}$
Drain-source on-state resistance	$R_{DS(\text{ON})}$		8.5	10.0		$V_{GS}=4.5 \text{ V}, I_D=9 \text{ A}$
Gate-source leakage current	I_{GSS}			100	nA	$V_{GS}=20 \text{ V}$
				-100		$V_{GS}=-20 \text{ V}$
Drain-source leakage current	I_{DSS}			1	A	$V_{DS}=100 \text{ V}, V_{GS}=0 \text{ V}$

Dynamic Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test condition
Input capacitance	C_{iss}		3530		pF	$V_{GS}=0\text{ V},$ $V_{DS}=50\text{ V},$ MHz
Output capacitance	C_{oss}		560		pF	
Reverse transfer capacitance	C_{rss}		9.0		pF	
Turn-on delay time	$t_{d(on)}$		22.5		ns	$V_{GS}=10\text{ V},$ $V_{DS}=50\text{ V},$ R_G $I_D=10\text{ A}$
Rise time	t_r		8.6		ns	
Turn-off delay time	$t_{d(off)}$		66.6		ns	
Fall time	t_f					

Electrical Characteristics Diagrams

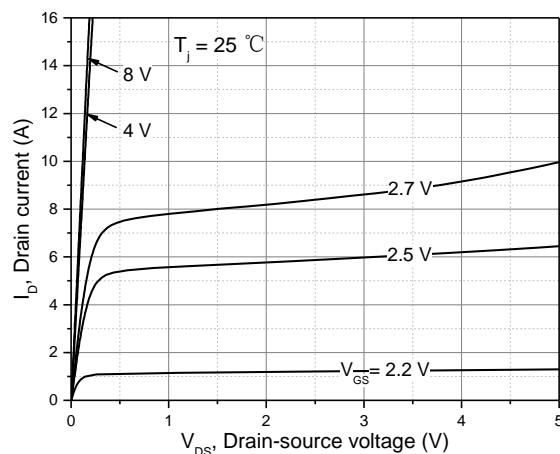


Figure 1. Typ. output characteristics

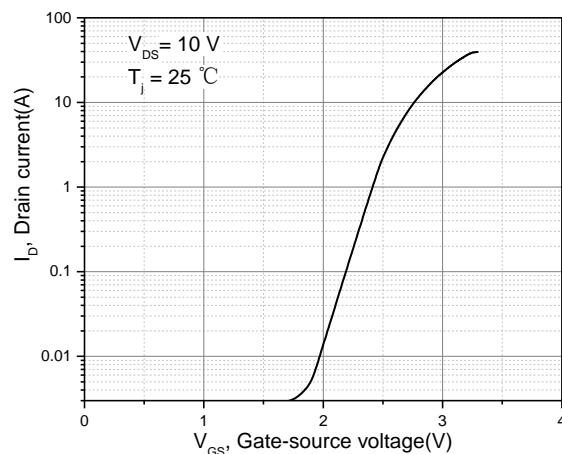


Figure 2. Typ. transfer characteristics

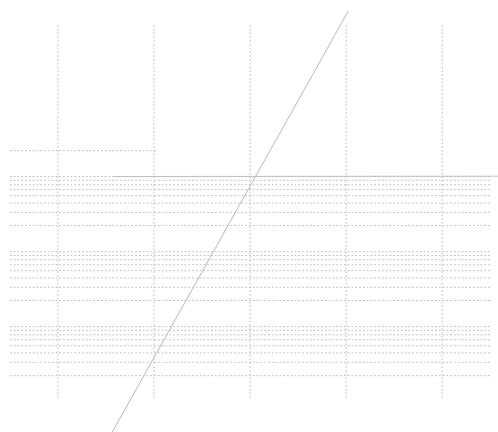


Figure 3. Typ. capacitances

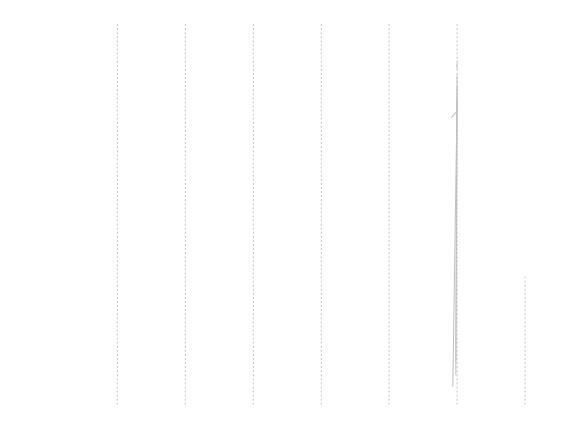


Figure 4. Typ. gate charge

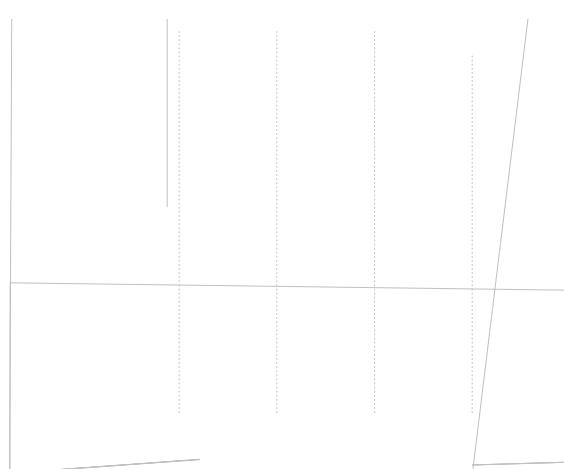


Figure 5. Drain-source breakdown voltage

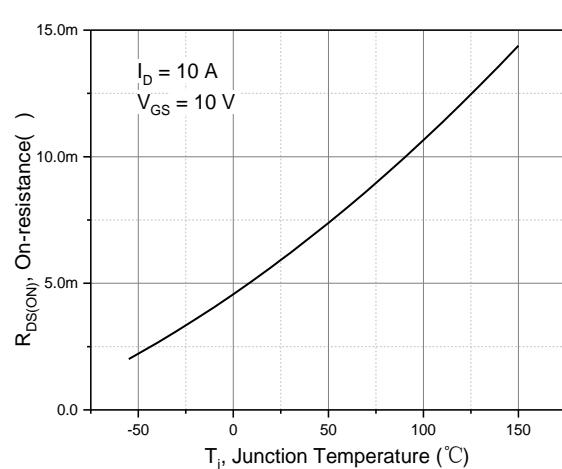


Figure 6. Drain-source on-state resistance

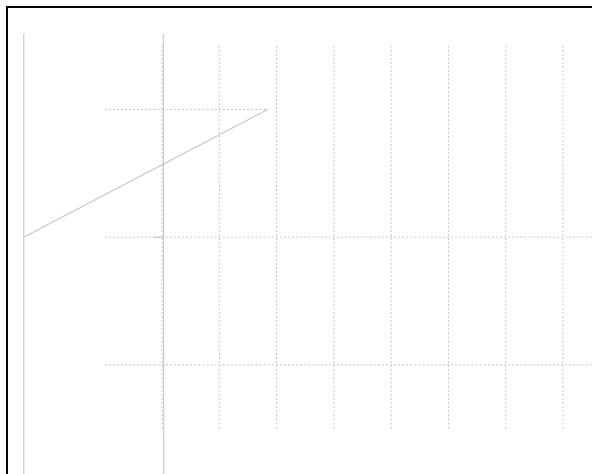


Figure 7. Drain-source on-state resistance

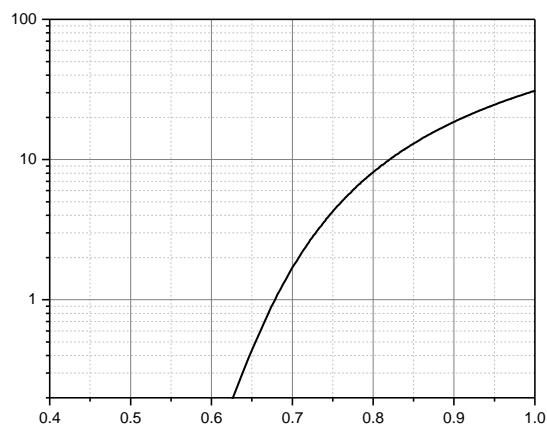


Figure 8. Forward characteristic of body diode

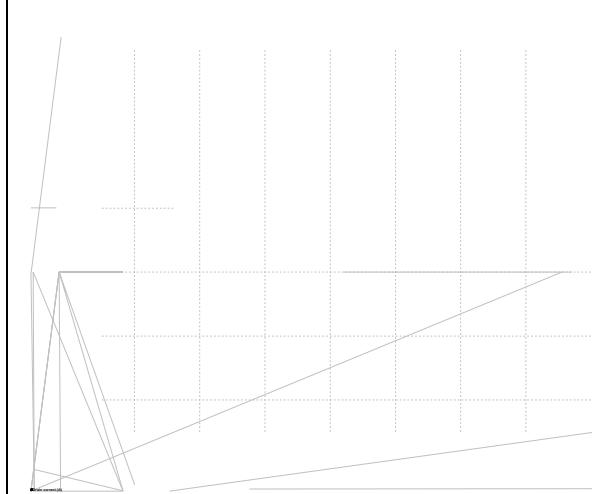


Figure 9. Drain current

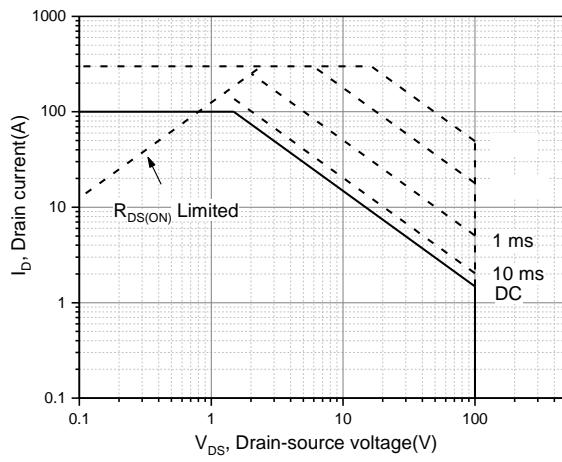


Figure 10. Safe operation area $T_c=25\text{ }^\circ\text{C}$

Test circuits and waveforms

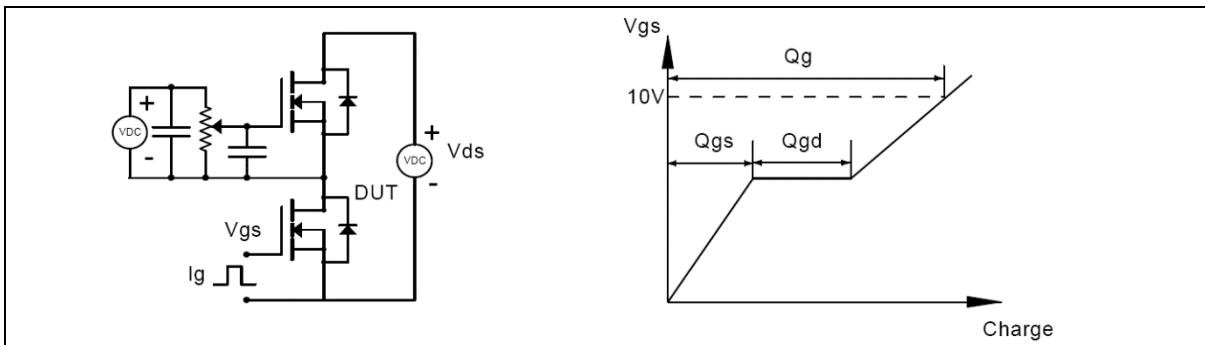


Figure 1. Gate charge test circuit & waveform

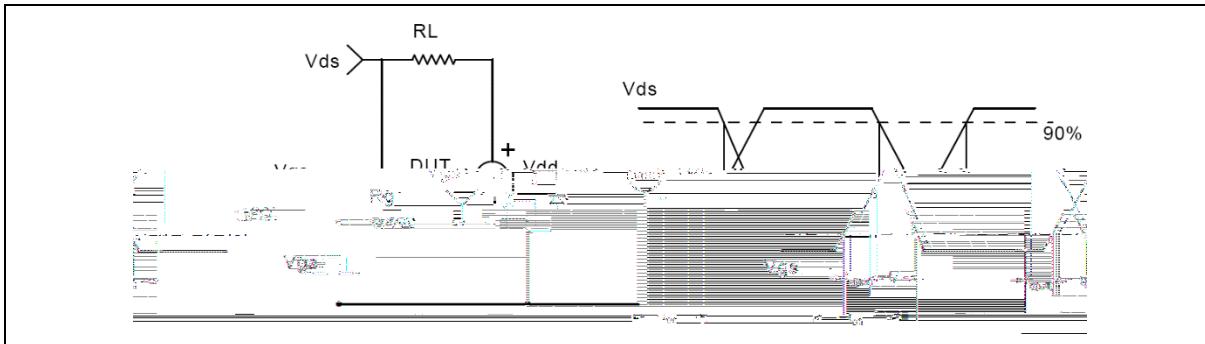


Figure 2. Switching time test circuit & waveforms

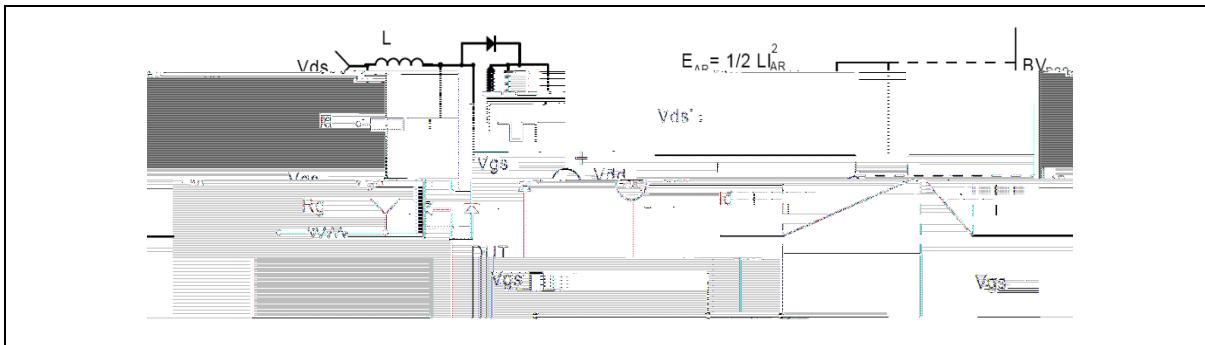


Figure 3. Unclamped inductive switching (UIS) test circuit & waveforms


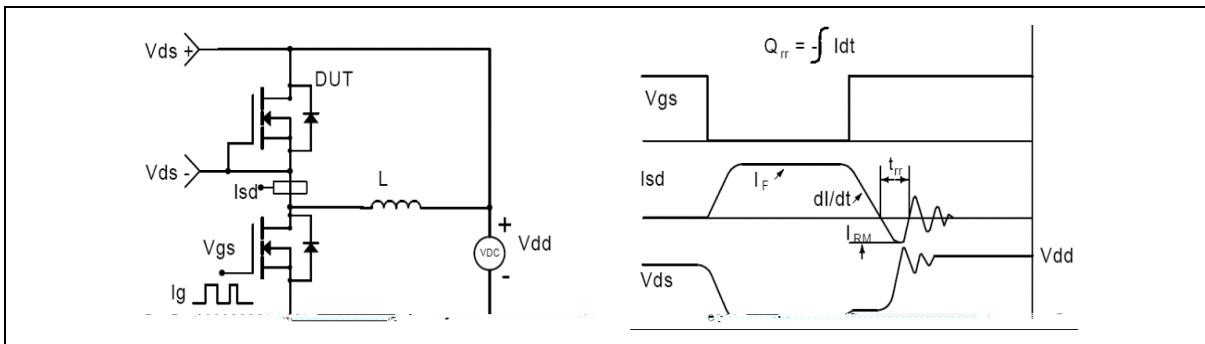


Figure 4. Diode reverse recovery test circuit & waveforms

Package Information

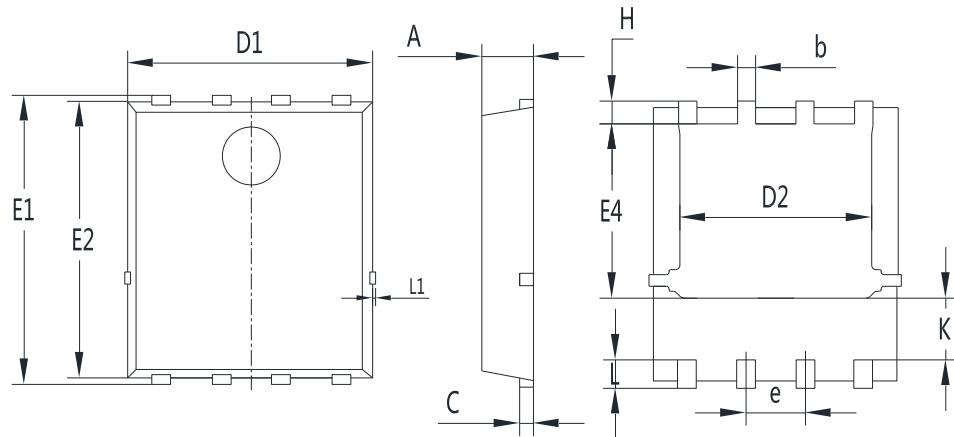

Symbol	mm		
	Min	Nom	Max
A	1.00	1.10	1.20
b	0.30	0.40	0.50
c	0.154	0.254	0.354
D1	5.00	5.20	5.40
D2	3.80	4.10	4.25
e	1.17	1.27	1.37
E1	5.95	6.15	6.35
E2	5.66	5.86	6.06
E4	3.52	3.72	3.92
H	0.40	0.50	0.60
L	0.30	0.60	0.70
L1	0.12 REF		
K	1.15	1.30	1.45

Version 1: PDFN5*6-C package outline dimension

Ordering Information

Package Type	Units/Reel	Reels / Inner Box	Units/Inner Box	Inner Boxes/Carton Box	Units/Carton Box
PDFN5*6-C	5000	2	10000	5	50000

Product Information

Product	Package	Pb Free	RoHS	Halogen Free
SFG10R08GF	PDFN5*6	yes	yes	yes

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Oriental Semiconductor hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

For further information on technology, delivery terms and conditions and prices, please contact the Oriental Semiconductor sales representatives (www.orientalsemi.com).

© Oriental Semiconductor Co.,Ltd. All Rights Reserved /