



	V_{RRM}		650	V
	V_{RSM}		650	V
	V_{DC}		650	V
	I_F	$T_C=25$ $T_C=125$ $T_C=158$	12 6.5 3	A
	I_{FRM}	$T_C=25$, $t_p=10ms$ Half Sine Wave $D=0.3$	20	A
	I_{FSM}	$T_C=25$, $t_p=10ms$ Half Sine Wave	35	A
	P_{TOT}	$T_C=25$	53	W
		$T_C=110$	23	W
	T_j		-55 to 175	
	T_{stg}		-55 to 175	
		M3 Screw 6-32 Screw	1 8.8	Nm lbf-in

	$R_{th,jc}$		2.81	$^{\circ}C/W$


3)

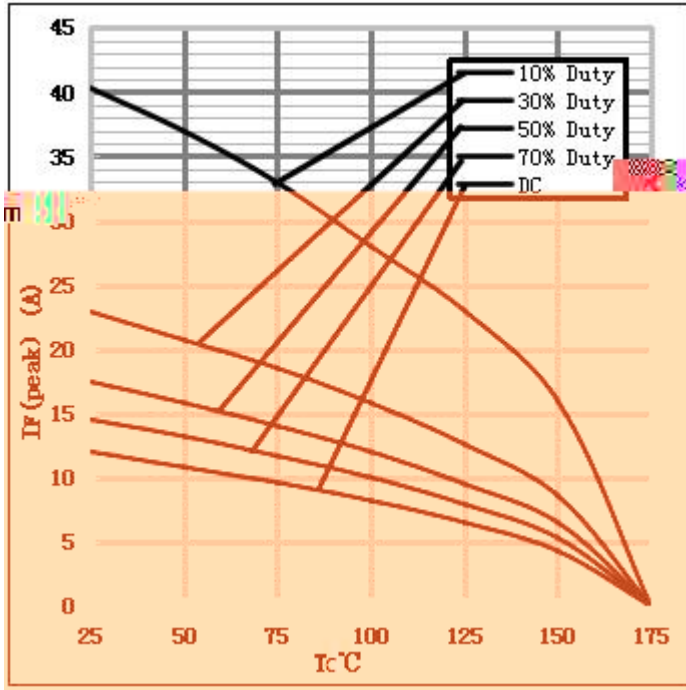

4)

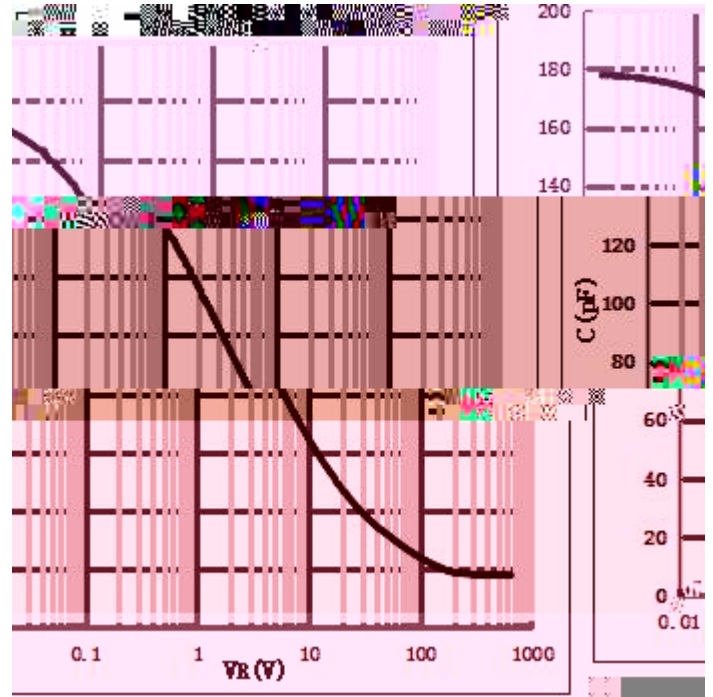

单位: mm

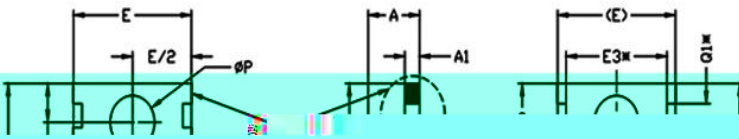

SYMBOL	DIMENSIONS			NOTES
	MIN.	NOM.	MAX.	
A	4.24	4.44	4.64	

ISO9001 2015

2015 9 23

ISO9000

ISO 1987

ISO9001

ISO9001

ISO9001 2015

<http://www.globalpowertech.cn/CompVisualize.asp>

<https://globalpowertech.en.alibaba.com/>

<http://www.globalpowertech.cn/>

