




G5S06504AT

150		

-
-
-
-

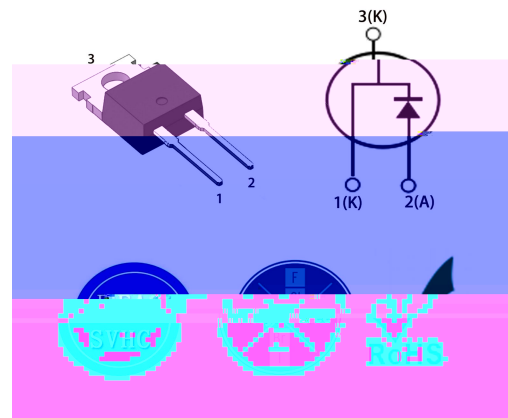

-
- (SMPS) (PFC)
 -


G5S06504AT	TO-220AC	G5S06504AT






V_F	$I_F=4A, T_j=25$	1.4	1.6	V
	$I_F=4A, T_j=175$	1.9	2.5	
I_R	$V_R=650V, T_j=25$	0.07	50	μA
	$V_R=650V, T_j=175$	0.65	2000	
Q_C	$= \int$		-	nC
C	$V_R=0V, T_j=25, f=1MHz$	181	220	pF
	$V_R=200V, T_j=2$	a^3	2	


1) $I_F=f(V_F)$ T_j

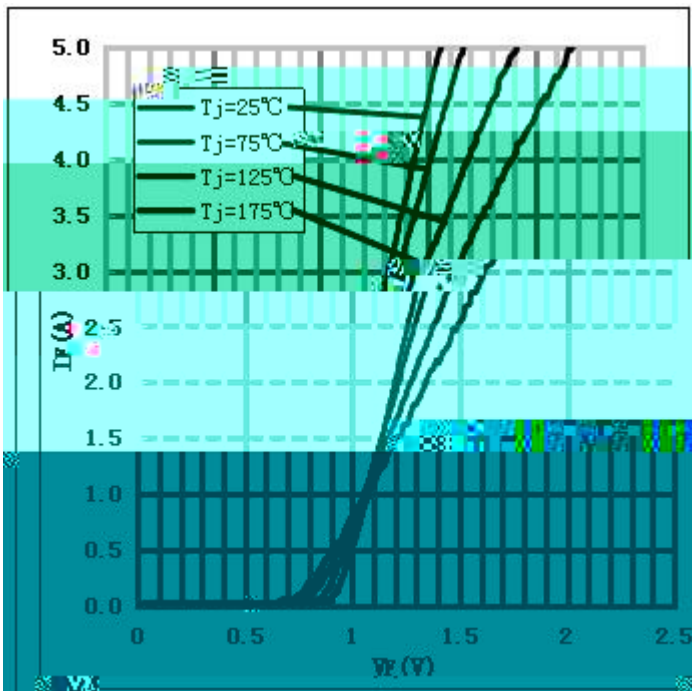



2)

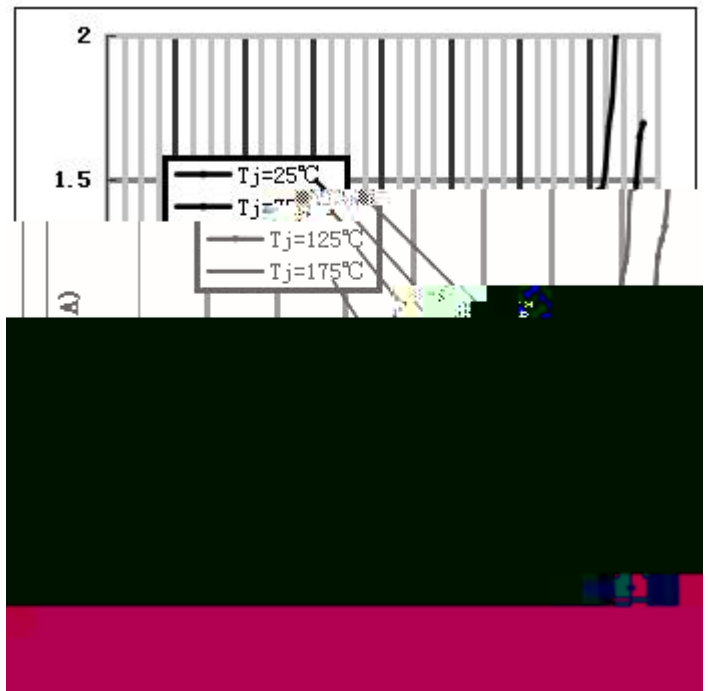

3)

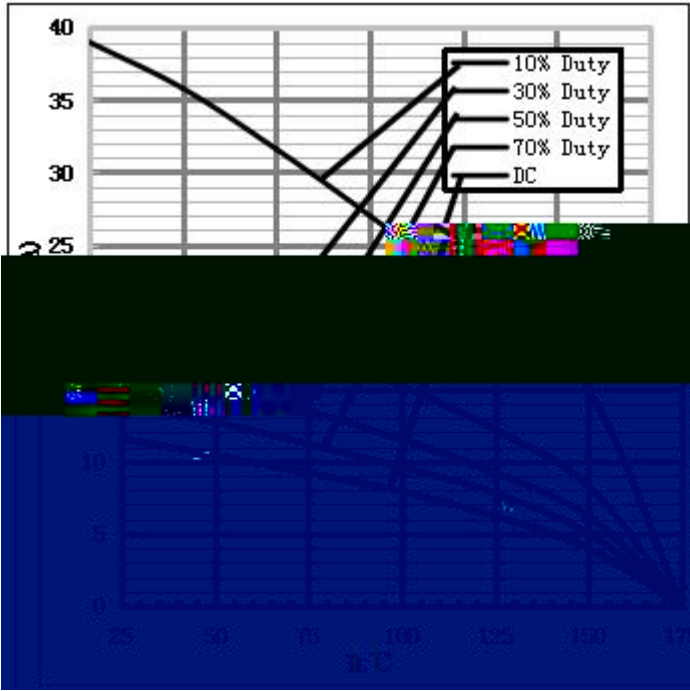

4)

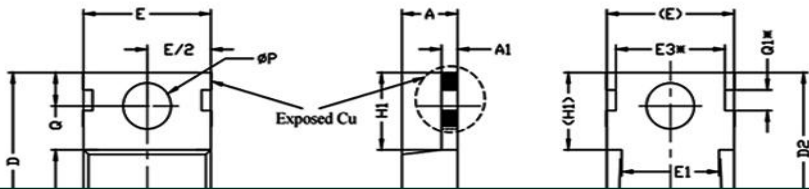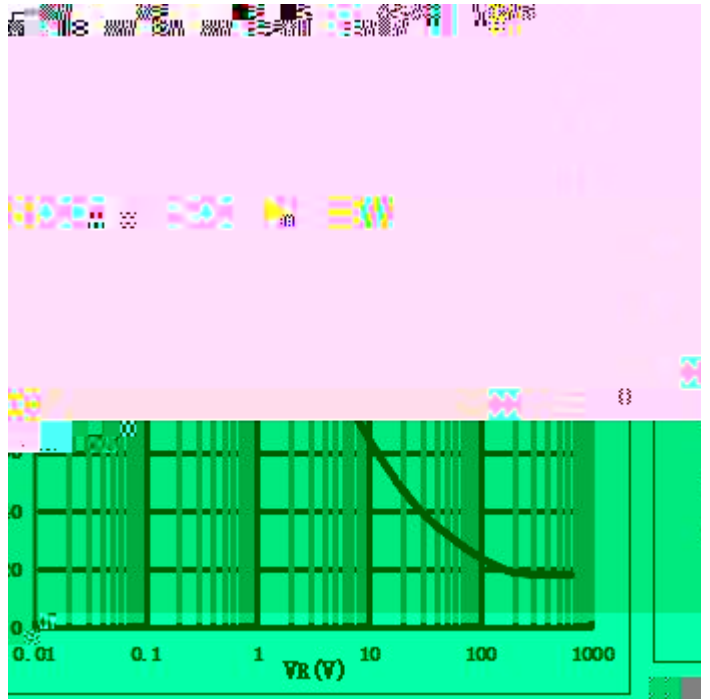

SYMBOL	DIMENSIONS			NOTES
	MIN.	NOM.	MAX.	
A	4.24	4.44	4.64	
A1	1.15	1.27	1.40	
A2	2.30	2.48	2.70	

:
ISO9001 2015

2015 9 23