





1200V/2A

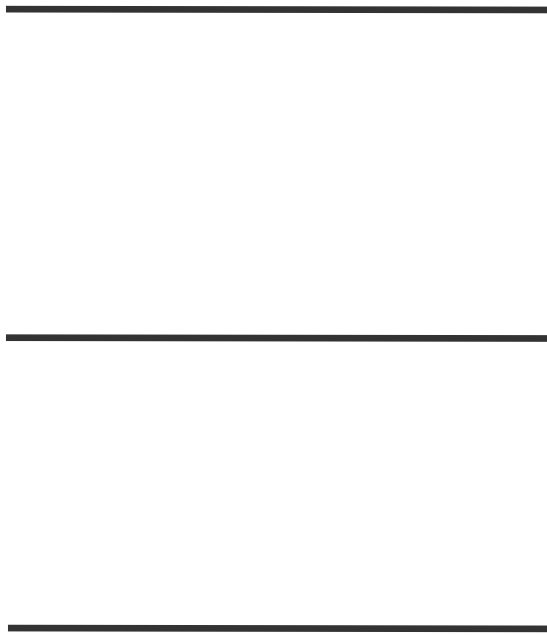

|           |      |    |
|-----------|------|----|
| $V_{RRM}$ | 1200 | V  |
| $I_F T_c$ | 2    | A  |
| $Q_c$     | 12   | nC |


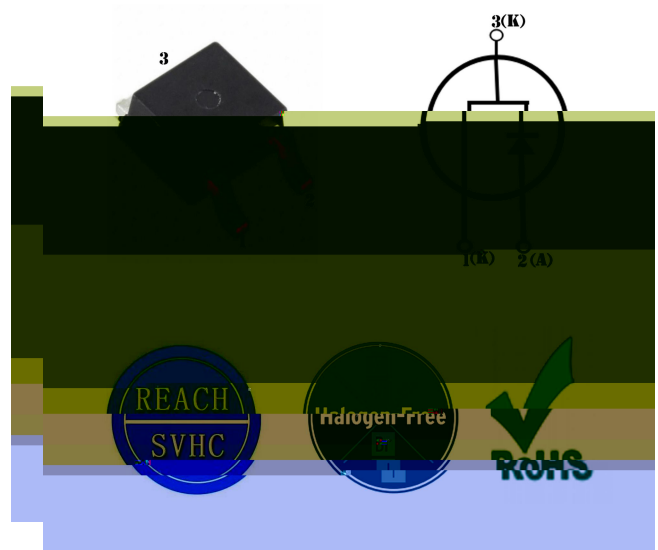




|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |




Tj=25

|  |  |          |  |  |  |
|--|--|----------|--|--|--|
|  |  |          |  |  |  |
|  |  |          |  |  |  |
|  |  |          |  |  |  |
|  |  |          |  |  |  |
|  |  | $= \int$ |  |  |  |
|  |  |          |  |  |  |
|  |  |          |  |  |  |

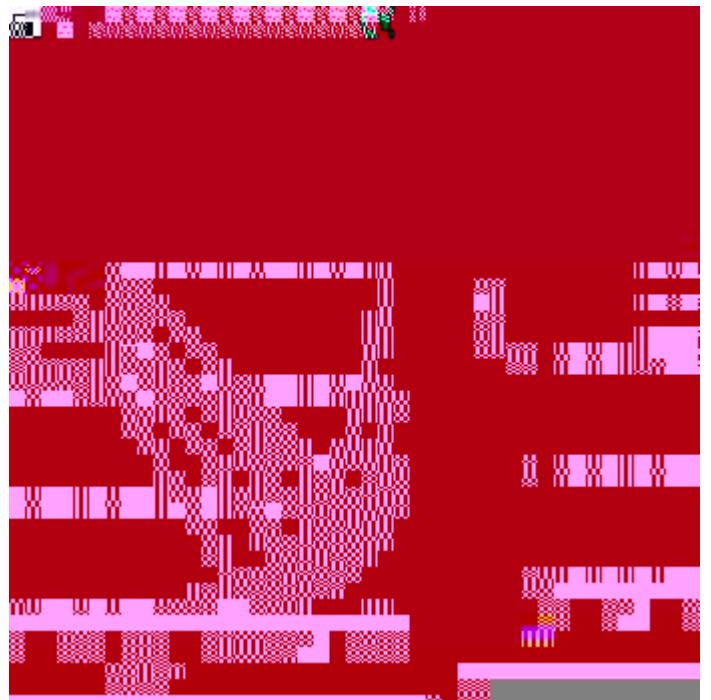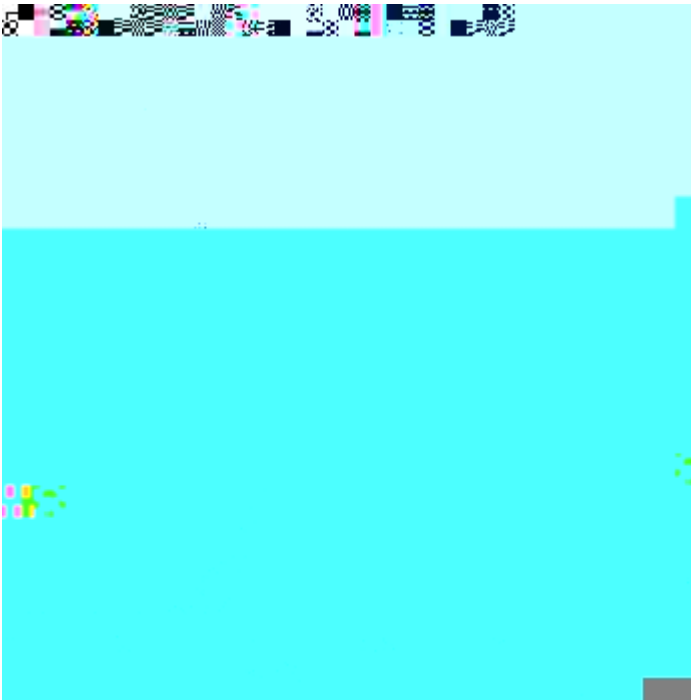


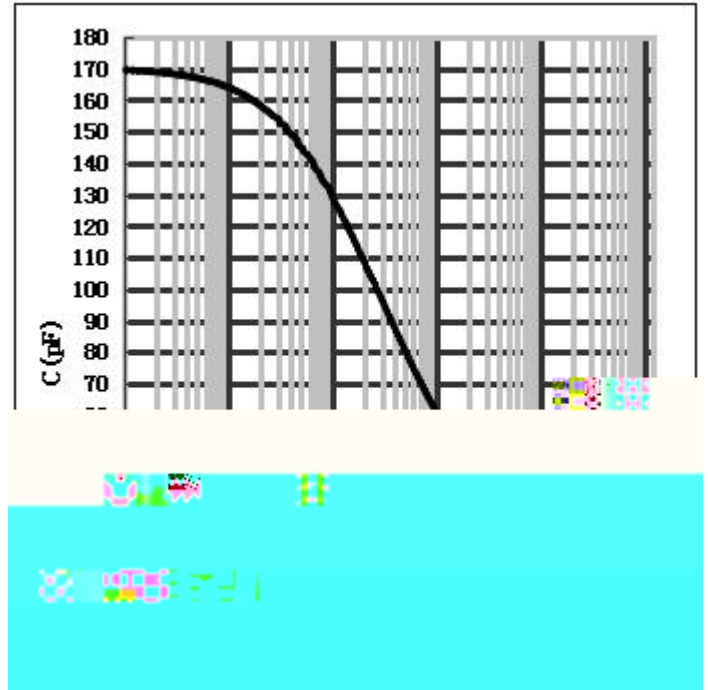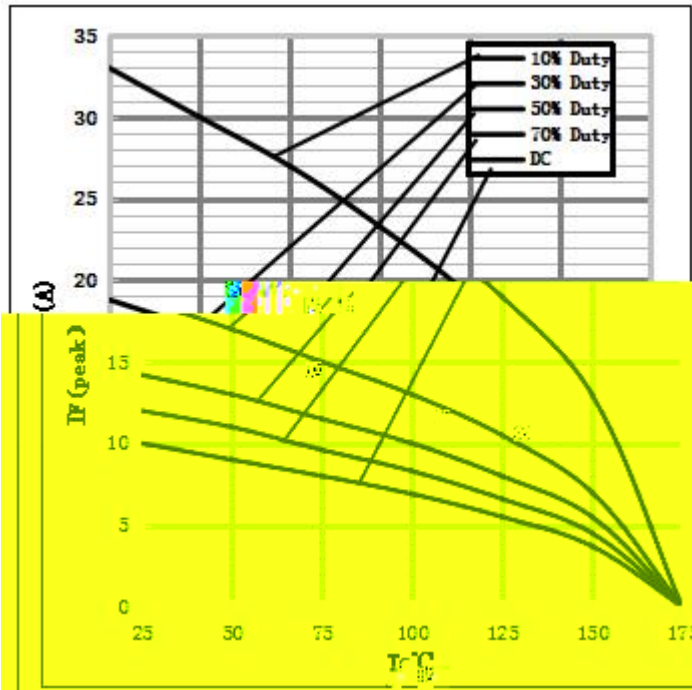

TO-252

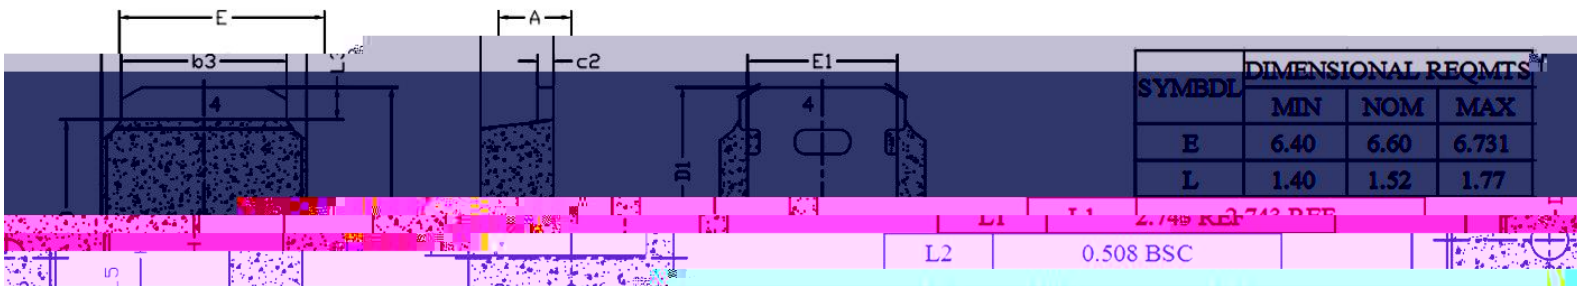

Lead Flash, But Including Any  
 The Top And Bottom Of The Plastic Body.  
 May Be Smaller Than The Package Bottom.  
 Does Not Include Dambar Protrusion. Allowable Dambar  
 0.10 mm Total In Excess Of "b" Dimension.



| SYMBOL | MIN  | NOM | MAX |
|--------|------|-----|-----|
| E1     | 4.40 | --  | --  |
| θ1     | 0°   | --  | 10° |

Mismatch Between  
 4. The Package Top  
 5. Dimension "b" D  
 Protrusion Shall E

