

MOSFET

65 V  
2.2 m  
2.5 m  
190 A  
120 A

e Unit  
A  
V  
V  
A  
mJ  
W

75

x Unit  
/W  
/W

Electrical Characteristics at  $T_j=25$  (unless otherwise specified)

## Static Characteristics

Parameter	Symbol	Conditions	Value		Unit	
			typ	max		
Drain to Source Breakdown Voltage	$V_{(BR)DSS}$		65	-	V	
Gate Threshold Voltage	$V_{GS(th)}$	$V_{GS}=V_{DS}$ , $I_D=250$ A	2.0	2.5	4.0	
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{GS}=0V$ , $V_{DS}=60V$ , $T_j=25$	-	-	1	A
		$V_{GS}=0V$ , $V_{DS}=60V$ , $T_j=100$	-	-	100	
Gate to Source Leakage Current	$I_{GSS}$	$V_{GS}=20V$ , $V_{DS}=0V$	-	-	100	nA
Drain to Source on Resistance			-	2.2	2.7	m
Drain to Source on Resistance			-	2.5	3	m
Transconductance	$g_{fs}$	$V_{DS}=5V$ , $I_D=20A$	-	70	-	S
Gate Resistance	$R_G$	$V_{GS}=0V$ , $V_{DS}$ Open, $f=1MHz$	-	0.5	-	

## Dynamic Characteristics

Input Capacitance	$C_{iss}$		-	5297	-	
Output Capacitance	$C_{oss}$	$V_{GS}=0V$ , $V_{DS}=30V$ , $f=1MHz$	-	1849	-	pF
Reverse Transfer Capacitance	$C_{rss}$		-	125	-	
	$Q_g(10V)$		-	92	-	
	$Q_{gd}$		-	22	-	nC
Reverse Recovery Time	$t_{rr}$	$V_R=30V$ , $I_F=20A$ , $dI_F/dt=100A/\mu s$	-	56	-	ns
Reverse Recovery Charge	$Q_{rr}$		-	67	-	nC



Figure 7. Typical Gate-Charge vs. Gate-to-Source Voltage

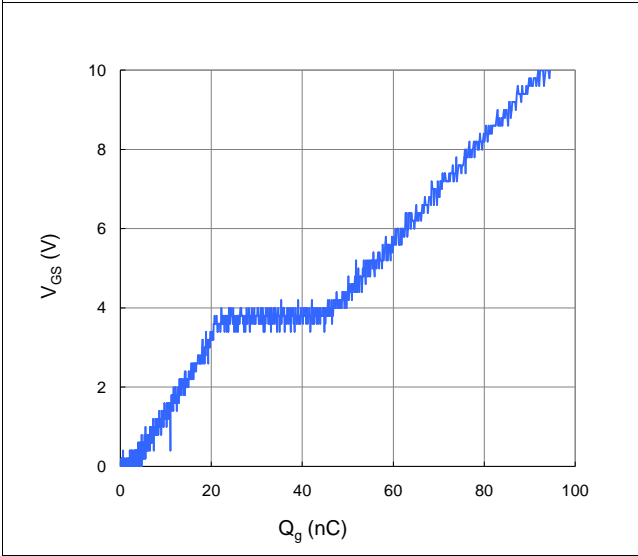


Figure 8. Typical Capacitance vs. Drain-to-Source Voltage

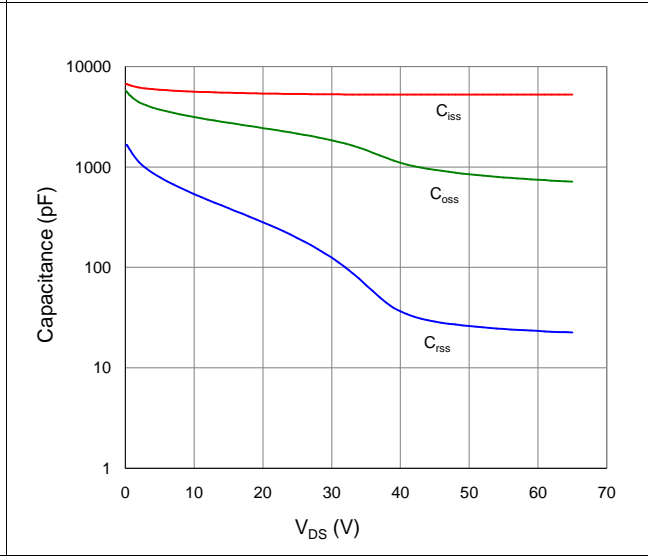


Figure 9. Maximum Safe Operating Area



Figure 10. Maximum Drain Current vs. Case Temperature



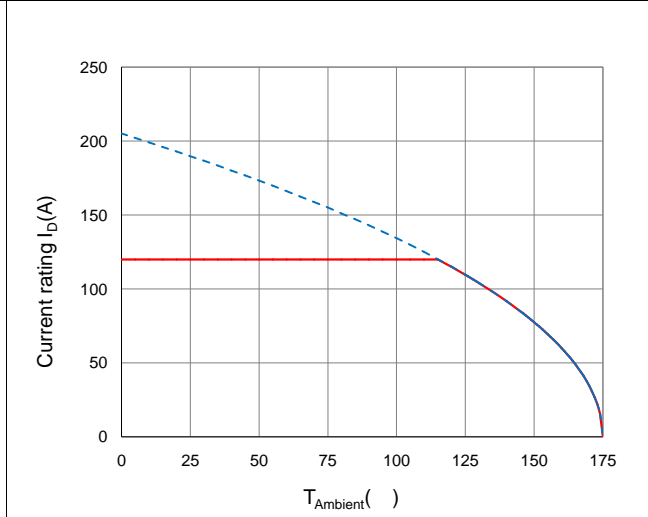



Figure 11. Normalized Maximum Transient Thermal Impedance, Junction-to-Ambient




Inductive switching Test

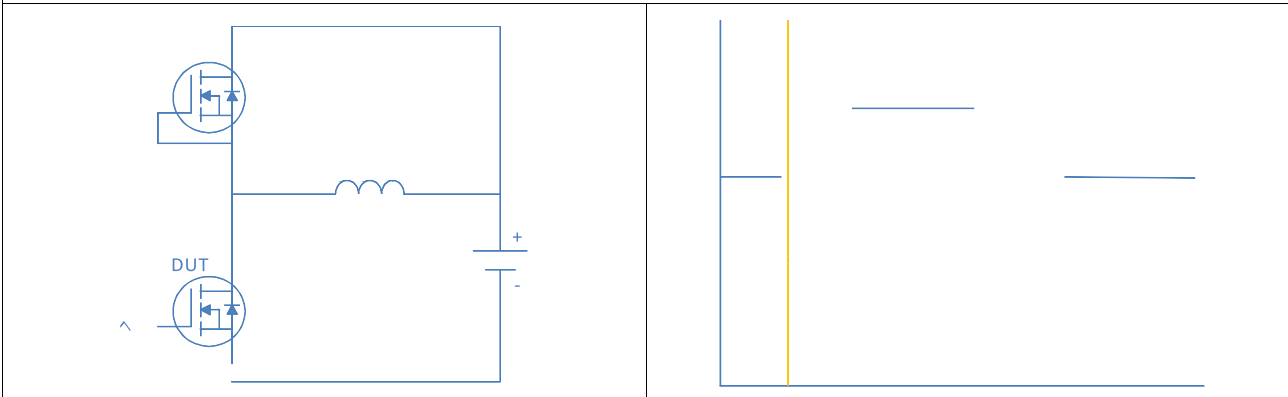


Gate Charge Test

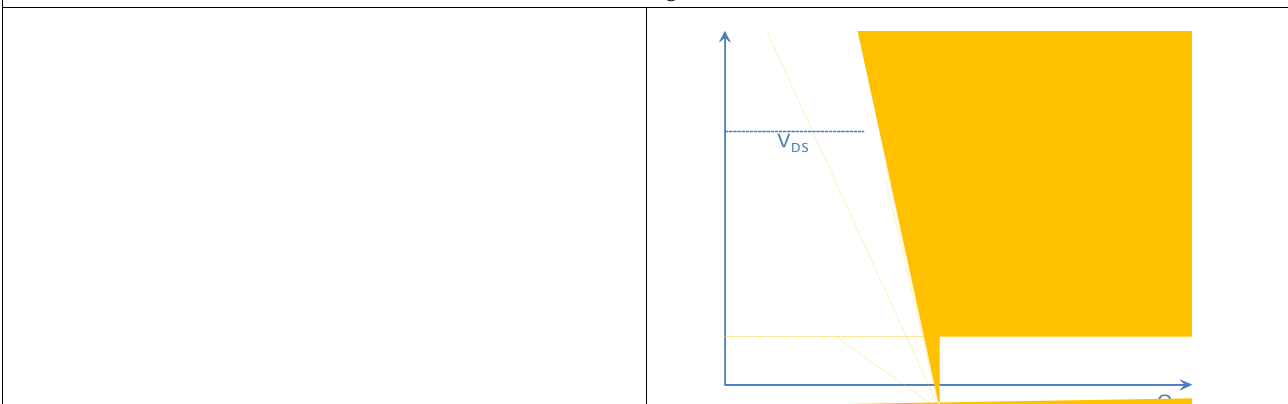

Uclamped Inductive Switching (UIS) Test

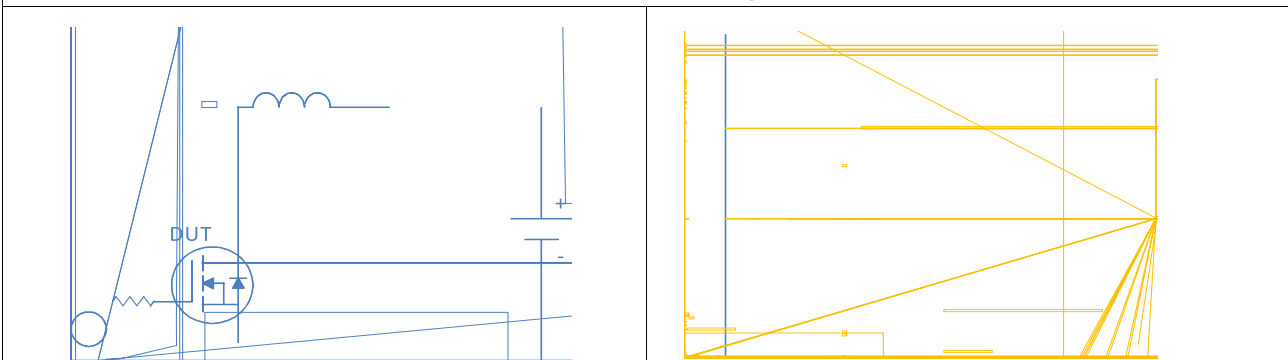


Diode Recovery Test

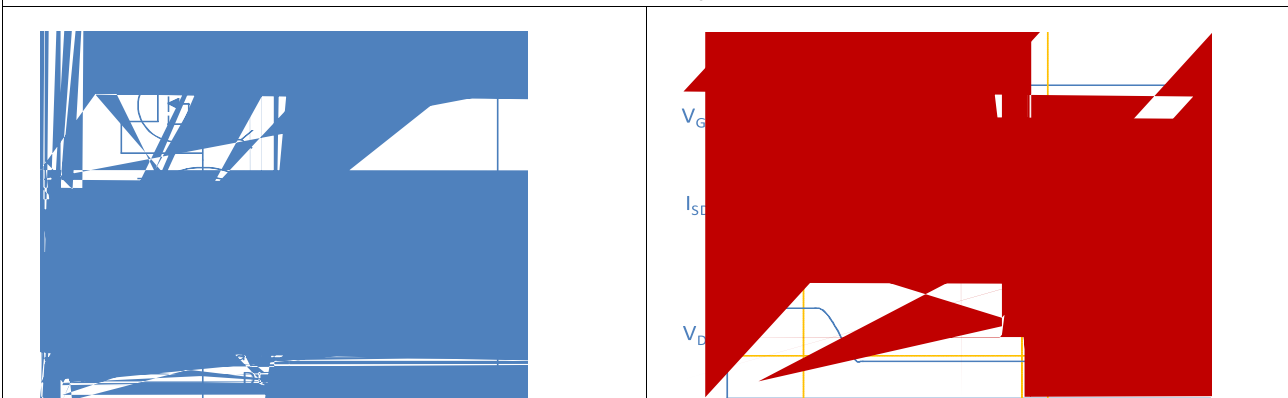

Package Outline


TO-263, 2 leads

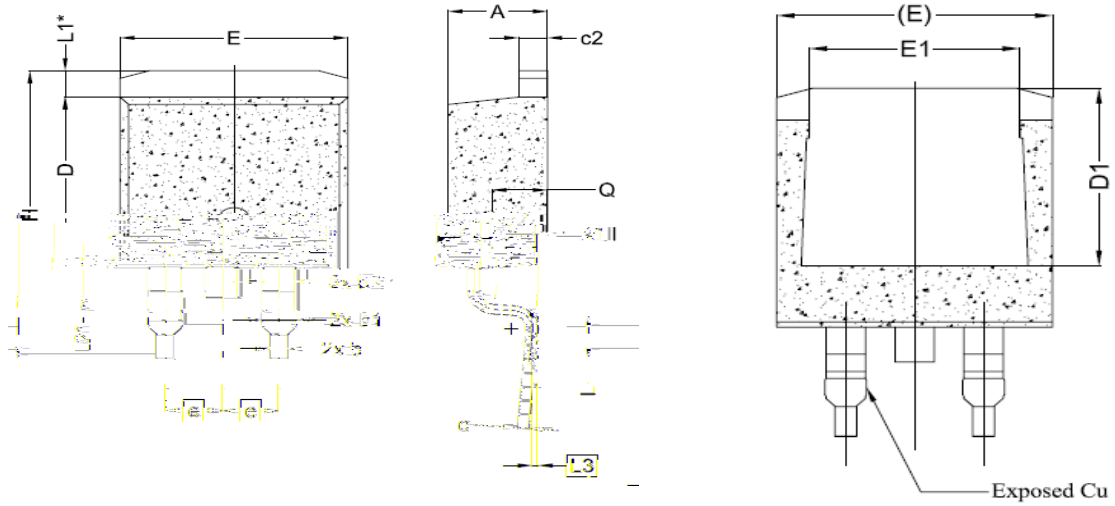

SYMBOL	DIMENSIONS		
	MIN.	NOM.	MAX.
A	4.24	4.44	4.64
A1	0.00	0.10	0.25
b	0.70	0.80	0.90
b1	1.20	1.55	1.75
b2	1.20	1.45	1.70
c	0.40	0.50	0.60
c2	1.15	1.27	1.40
D	8.82	8.92	9.02
D1	6.86	7.65	—
E	9.26	10.18	10.28
E1	8.59	7.77	7.69
e	2.54 BSC		
H	14.87	15.08	15.33
L	1.78	2.32	2.78
L1	1.50 REF.		
L2	1.50 REF.		
L3	0.25 BSC		
Q	2.30	2.48	2.70

Package Outline

TO-220, 3 leads

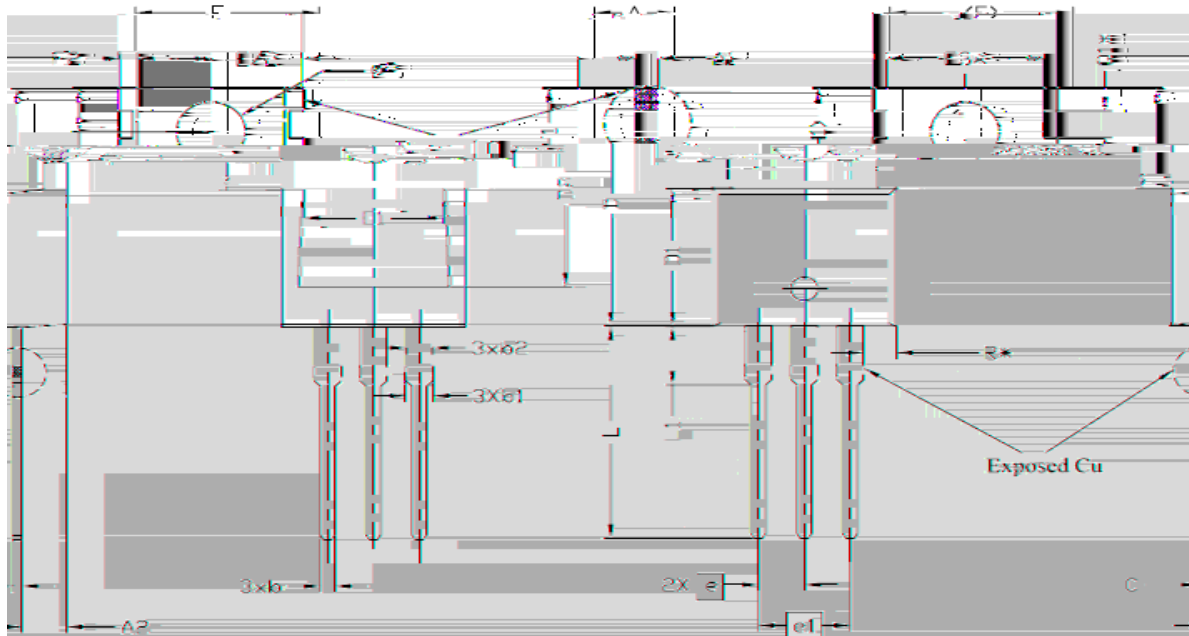

SYMBOL	DIMENSIONS			NOTES
	MIN.	NOM.	MAX.	
A	4,24	4,44	4,64	
A1	1,15	1,27	1,40	
A2	2,30	2,48	2,70	
b	0,70	0,80	0,90	
b1	1,20	1,55	1,75	
b2	1,20	1,45	1,70	
c	0,40	0,50	0,60	
D	14,70	15,37	16,00	4
D1	8,82	8,92	9,02	
D2	12,63	12,73	12,83	5
E	9,96	10,16	10,36	4,5
E1	6,86	7,77	8,89	5
E2	-	-	0,76	6
E3*	8,70REF.			
e	2,54BSC			
e1	5,08BSC			
H1	6,30	6,45	6,60	5,6
L	13,47	13,72	13,97	
L1	3,60	3,80	4,00	
ØP	3,75	3,84	3,93	
Q	2,60	2,80	3,00	
Q1*	1,73REF.			
R*	1,82REF.			