





			$\Omega$
			$\Omega$

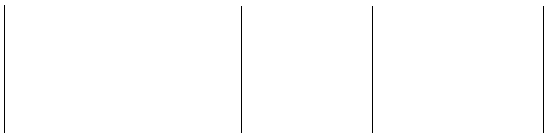

=25 (unless otherwise specified)

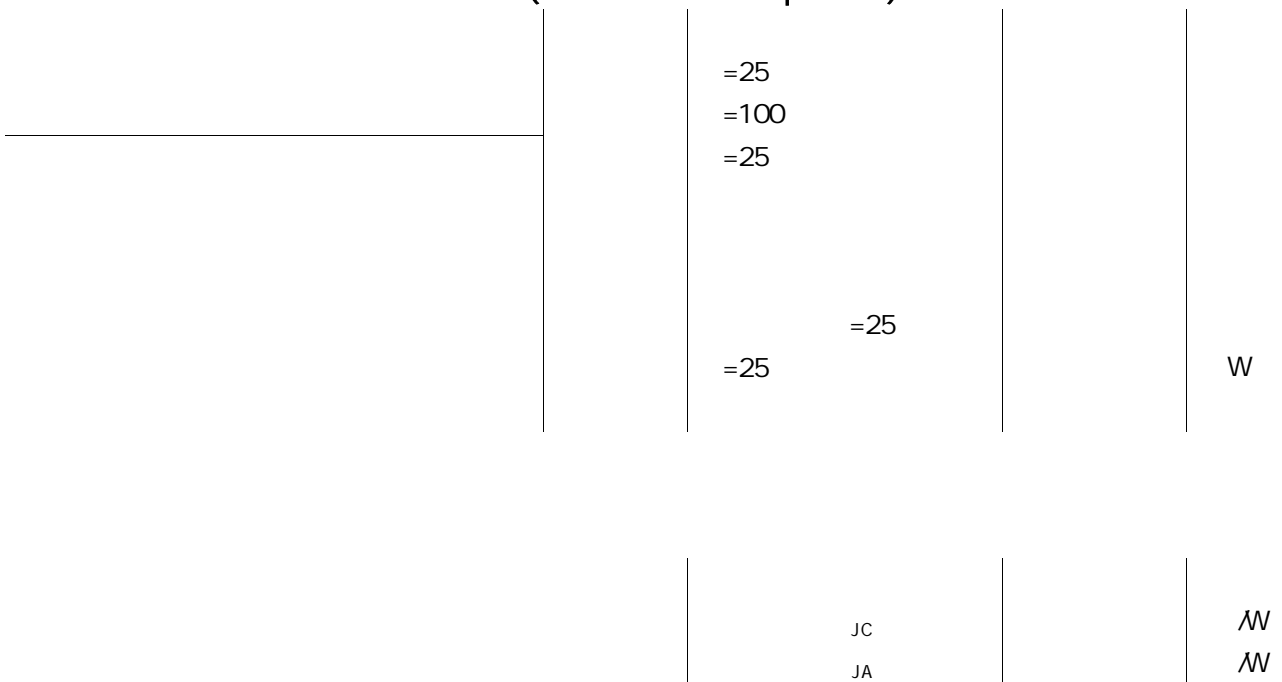



=25 (unless otherwise specified)

		$\mu$				
		$\mu$				
		=25				$\mu$
		=100				
						$\Omega$
	fs					
		Open, f=1MHz				$\Omega$

		=60V, f=1MHz				
Reverse Transfer Capacitance						
Turn off Delay Time	d(off)	$\Omega$				
	f					

		$dt=500A/\mu$				



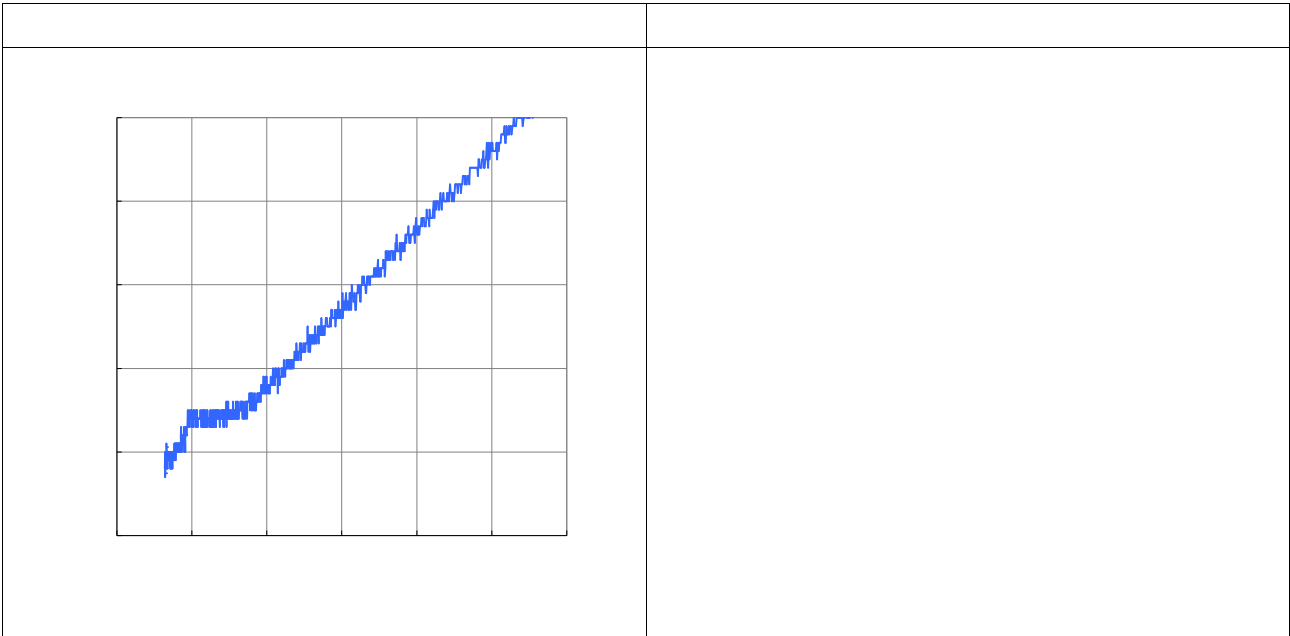


Figure 9. Maximum Safe Operating Area




Figure 11. Normalized Maximum Transient Thermal Impedance, Junction-to-Case

