
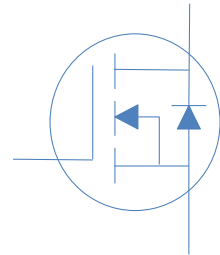




		Ω

=25 (unless otherwise specified)

		=25	
		=100	
		=25	
		=25	

		0	W
		0	W



=25 (unless otherwise specified)

		$\mu$				
		$\mu$				
		=25				$\mu$
		=125				
						$\Omega$
	fs					
		=0V, f=1MHz				$\Omega$

		=15V, f=1MHz				
Reverse Transfer Capacitance						
Turn off Delay Time	d(off)	$\Omega$				
	f					

		$/dt=100A/\mu$				





--	--

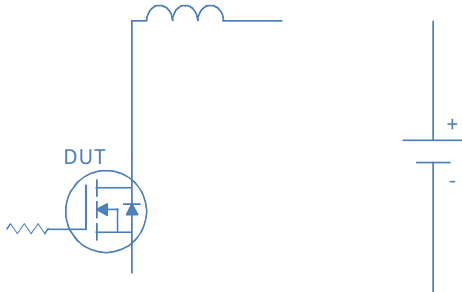
Figure 9. Maximum Safe Operating Area	
---------------------------------------	--

Figure 11. Normalized Maximum Transient Thermal Impedance, Junction-to-Ambient
--




--	--

--	--

	
---	--

--	--

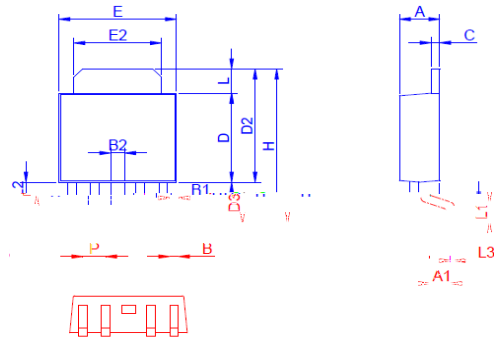

Dimension	A	A1	B	B1	B2	C	D	D2	D3	E	E2	H	L	L1	L2	L3	P	R
	1.30	1.50	1.10	1.37	1.15	1.15	1.10	1.10	0.30	1.15	0.80	0.60	5.70	7.30	3.00	6.70	5.45	
	-10.15	1.70	-1.50	-1.10	-0.30	-1.37	Max.	2.50	1.30	0.70	0.75	0.80	0.60	5.70	7.30	3.00	6.70	5.45