



Feature


- High Speed Power Switching, Logic Level
- Enhanced Avalanche Ruggedness
- 100% UIS Tested, 100% Rg Tested
- Lead Free, Halogen Free

			Ω

Application

- Hard Switching and High Speed Circuit
- DC/DC in Telecoms and Industrial

SOT-23



	θ		












		μ				
		μ				
						μ
						Ω


		Ω				

--	--	--	--	--	--	--



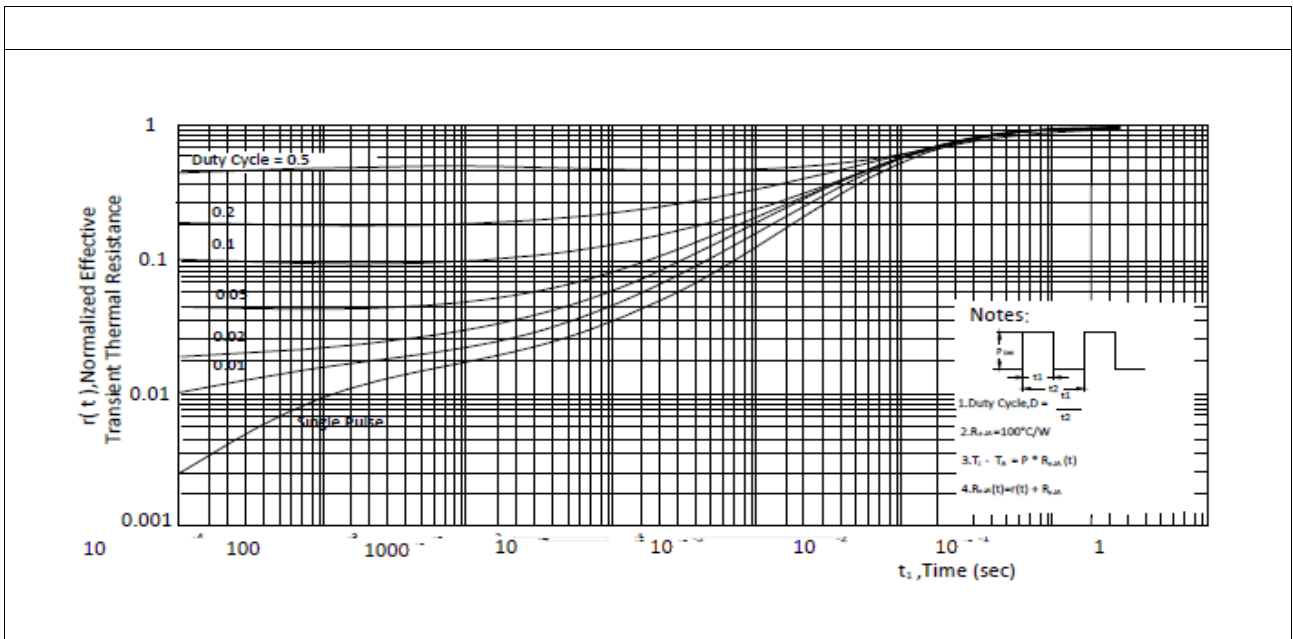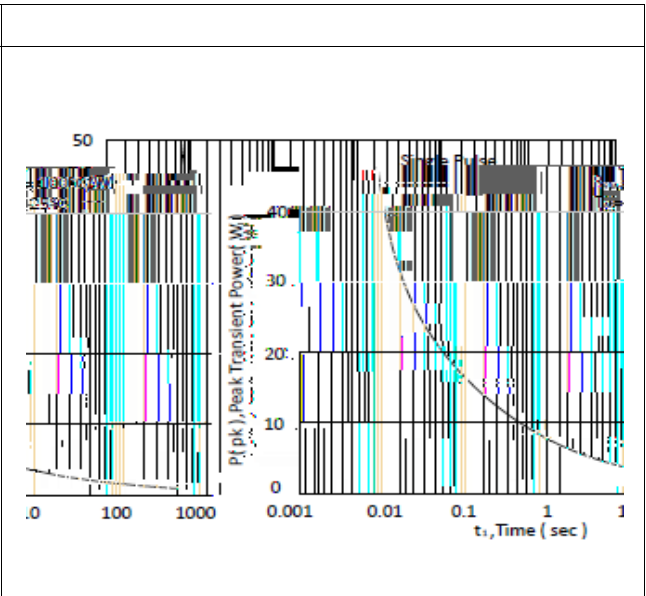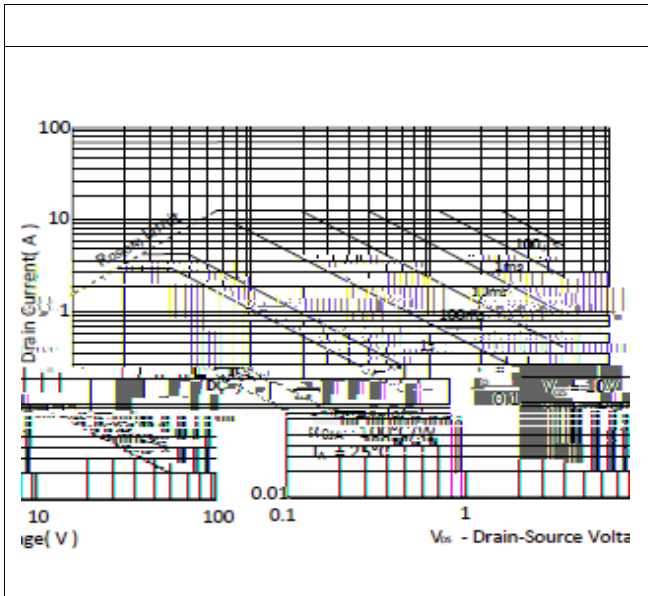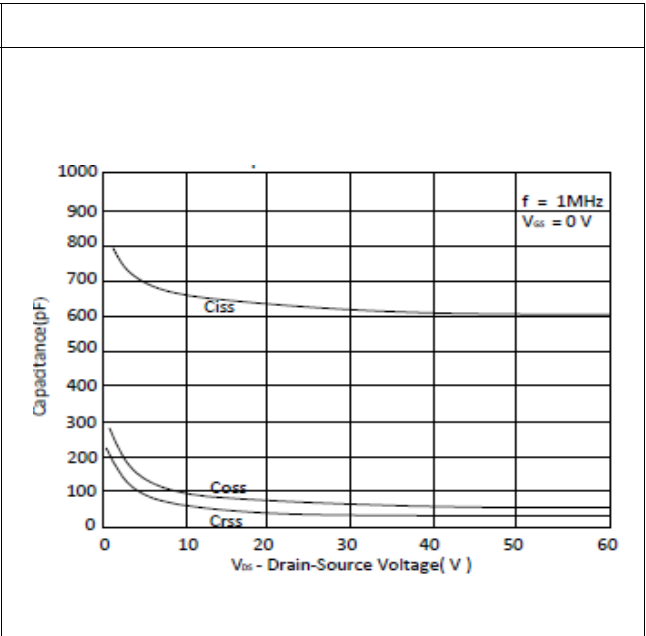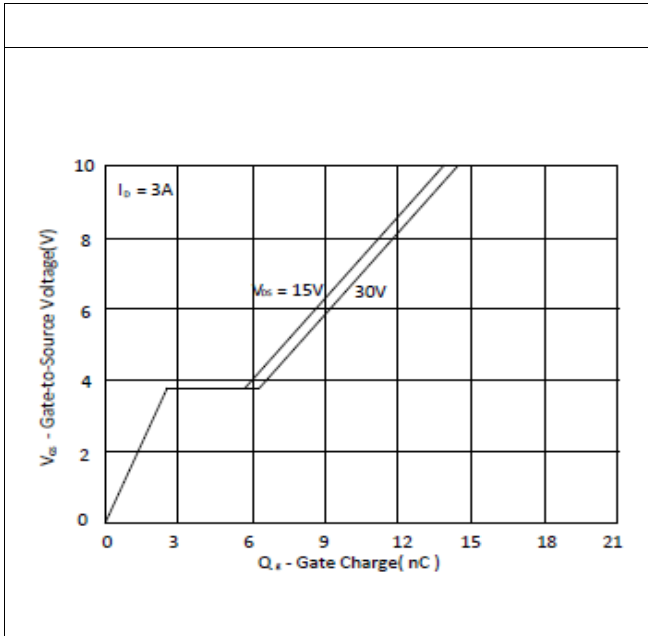

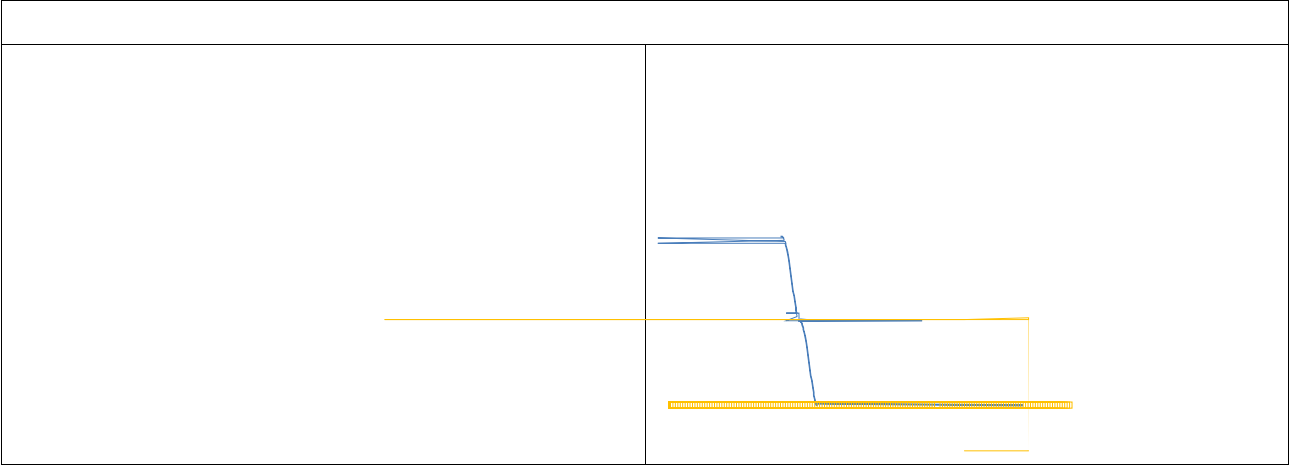

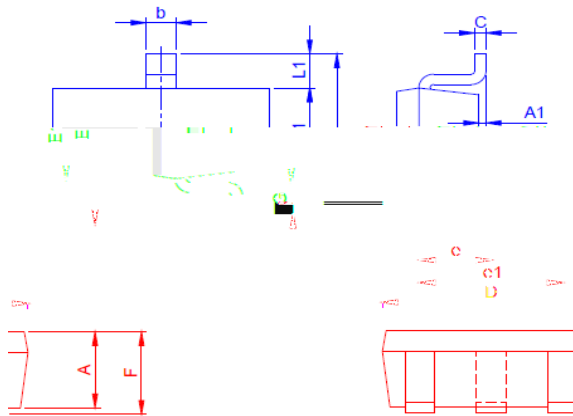

Dimension in mm

Dimension	A	A1	A2	b	C	D	E	E1	e	e1	F	G	L1
Min.	0.7	0		0.35	0.1	2.8	2.6	1.5	0.9		0.8	0.3	0.55
Typ.						2.9	2.8	1.6	0.95	1.9			
Max.	1.12	0.1		0.5	0.2	3	3	1.7	1		1.2	0.6	0.65