Hunteck

Feature

- High Speed Power Switching, Logic Level
- Enhanced Avalanche Ruggedness
- 100% UIS Tested, 100% Rg Tested
- Lead Free, Halogen Free

			Ω

Application

- Hard Switching and High Speed Circuit
- DC/DC in Telecoms and Inductrial

DFN3x3





	θ		
	θ		

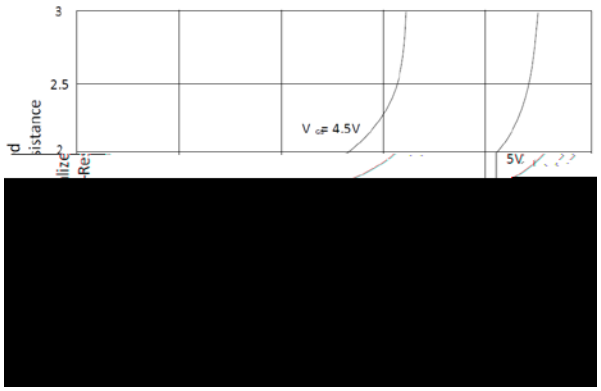 3 2.5 V GS= 4.5V 5V	

	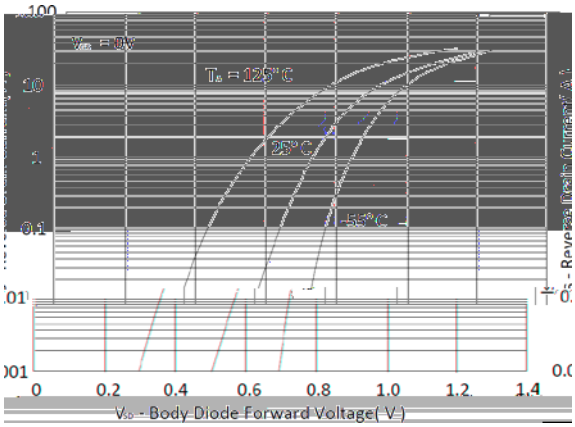 100 VGS = 0V TA = 125°C 25°C -55°C 0.1 0 0.2 0.4 0.6 0.8 1.0 1.2 1.4 VSD - Body Diode Forward Voltage(V)

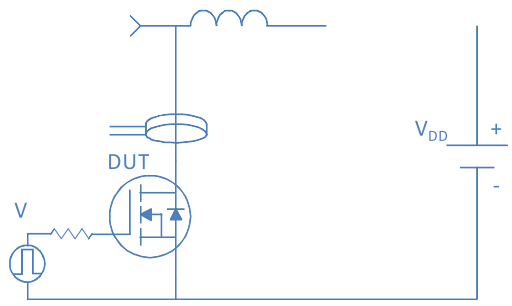
DUT
V
V_{DD}
+
-