



N-channel MOSFET

## Features

- Low gate charge
- 100% avalanche tested
- Improved dv/dt capability
- RoHS compliant
- Halogen free package
- JEDEC Qualification

$BV_{DSS}$	$I_D$	$R_{DS(on)}$
900V	2.5A	<5.1 $\Omega$



Device	Package	Marking	Remark
TMD3N90/ TMU3N90	D-PAK/I-PAK	TMD3N90 / TMU3N90	RoHS
TMD3N90G / TMU3N90G	D-PAK/I-PAK	TMD3N90G / TMU3N90G	Halogen Free

## Absolute Maximum Ratings

Parameter	Symbol	TMD3N90(G)/TMU3N90(G)	Unit
Drain-Source Voltage	$V_{DSS}$	900	V
Gate-Source Voltage	$V_{GS}$	30	V
Continuous Drain Current	$I_D$	$T_C = 25$	2.5
		$T_C = 100$	1.6
Pulsed Drain Current (Note 1)	$I_{DM}$	10	A
Single Pulse Avalanche Energy (Note 2)	$E_{AS}$	16.6	mJ
Repetitive Avalanche Current (Note 1)	$I_{AR}$	2.5	A
Repetitive Avalanche Energy (Note 1)	$E_{AR}$	9.4	mJ
Power Dissipation	$P_D$	$T_C = 25$	94
		Derate above 25	0.75
Peak Diode Recovery dv/dt (Note 3)	dv/dt	4.5	V/ns
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55~150	
Maximum lead temperature for soldering purposes,	$T_L$	300	

\* Limited only by maximum junction temperature

## Thermal Characteristics

Parameter	Symbol	TMD3N90(G)/TMU3N90(G)	Unit
Maximum Thermal resistance, Junction-to-Case	$R_{\theta JC}$	1.33	/W
Maximum Thermal resistance, Junction-to-Ambient	$R_{\theta JA}$	110	/W

**Electrical Characteristics :  $T_C=25$  , unless otherwise noted**

Parameter	Symbol	Test condition	Min	Typ	Max	Units
<b>OFF</b>						
Drain-Source Breakdown Voltage	$BV_{DSS}$	$V_{GS} = 0\text{ V}, I_D = 250\ \mu\text{A}$	900	--	--	V
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = 900\text{ V}, V_{GS} = 0\text{ V}$	--	--	1	$\mu\text{A}$
		$V_{DS} = 720\text{ V}, T_C = 125^\circ\text{C}$	--	--	10	$\mu\text{A}$
Forward Gate-Source Leakage Current	$I_{GSSF}$	$V_{GS} = 30\text{ V}, V_{DS} = 0\text{ V}$	--	--	100	nA
Reverse Gate-Source Leakage Current	$I_{GSSR}$	$V_{GS} = -30\text{ V}, V_{DS} = 0\text{ V}$	--	--	-100	nA

**ON**

Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\ \mu\text{A}$	2	--	4	V
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = 10\text{ V}, I_D = 1.25\text{ A}$	--	4.3	5.1	$\Omega$
Forward Transconductance <sup>(Note 4)</sup>	$g_{FS}$	$V_{DS} = 30\text{ V}, I_D = 1.25\text{ A}$	--	3	--	S

**DYNAMIC**

Input Capacitance	$C_{iss}$	$V_{DS} = 25\text{ V}, V_{GS} = 0\text{ V},$ $f = 1.0\text{ MHz}$	--	748	--	pF
Output Capacitance	$C_{oss}$		--	55	--	pF
Reverse Transfer Capacitance	$C_{rss}$		--	8.7	--	pF

**SWITCHING**







Turn-On Delay Time <sup>(Note 4,5)</sup>	$t_{d(on)}$	$V_{DD} = 450\text{ V}, I_D = 2.5\text{ A},$ $R_G = 25$	--	16	--	ns
Turn-On Rise Time <sup>(Note 4,5)</sup>	$t_r$		--	25	--	ns
Turn-Off Delay Time <sup>(Note 4,5)</sup>	$t_{d(off)}$		--	63	--	ns
Turn-Off Fall Time <sup>(Note 4,5)</sup>	$t_f$		--	31	--	ns
Total Gate Charge <sup>(Note 4,5)</sup>	$Q_g$	$V_{DS} = 720\text{ V}, I_D = 2.5\text{ A},$ $V_{GS} = 10\text{ V}$	--	17	--	nC
Gate-Source Charge <sup>(Note 4,5)</sup>	$Q_{gs}$		--	2.4	--	nC
Gate-Drain Charge <sup>(Note 4,5)</sup>	$Q_{gd}$		--	6.6	--	nC






**SOURCE DRAIN DIODE**

Maximum Continuous Drain-Source Diode Forward Current	$I_S$	----	--	--	2.5	A
Maximum Pulsed Drain-Source Diode Forward Current	$I_{SM}$	----	--	--	10	A
Drain-Source Diode Forward Voltage	$V_{SD}$	$V_{GS} = 0\text{ V}, I_S = 2.5\text{ A}$	--	--	1.5	V
Reverse Recovery Time <sup>(Note 4)</sup>	$t_{rr}$	$V_{GS} = 0\text{ V}, I_S = 2.5\text{ A}$ $di_F / dt = 100\text{ A}/\mu\text{s}$	--	355	--	ns
Reverse Recovery Charge <sup>(Note 4)</sup>	$Q_{rr}$		--	1.8	--	$\mu\text{C}$



Note :

1. Repetitive rating : Pulse width limited by maximum junction temperature
2.  $L=5.0\text{mH}, I_{AS} = 2.5\text{A}, V_{DD} = 50\text{V}, R_G = 25$  , Starting  $T_J = 25$
3.  $I_{SD} = 2.5\text{A}, di/dt = 100\ \mu\text{s}, V_{DD} = 50\text{V}, V_{DS} = 720\text{V}$ , Starting  $T_J = 25$
5. Essentially Independent of Operating Temperature Typical Characteristics

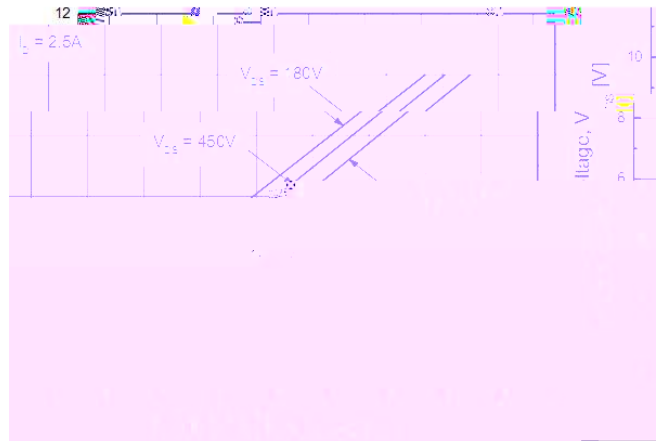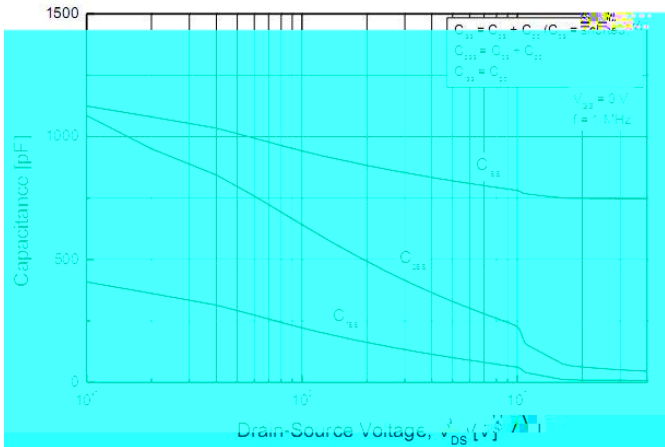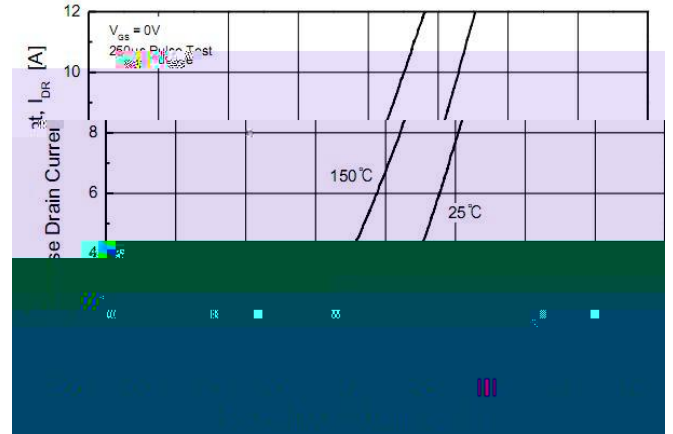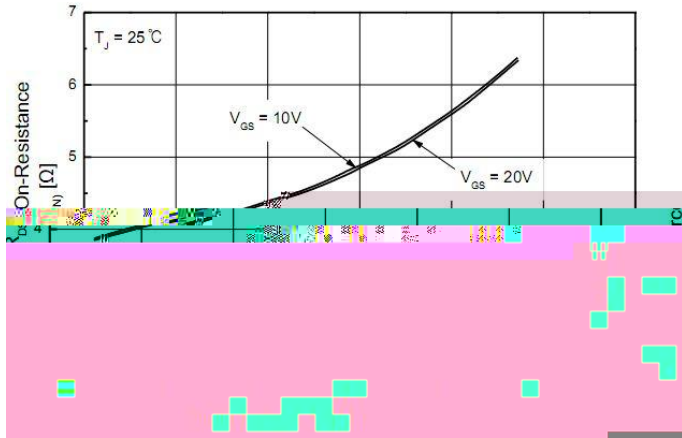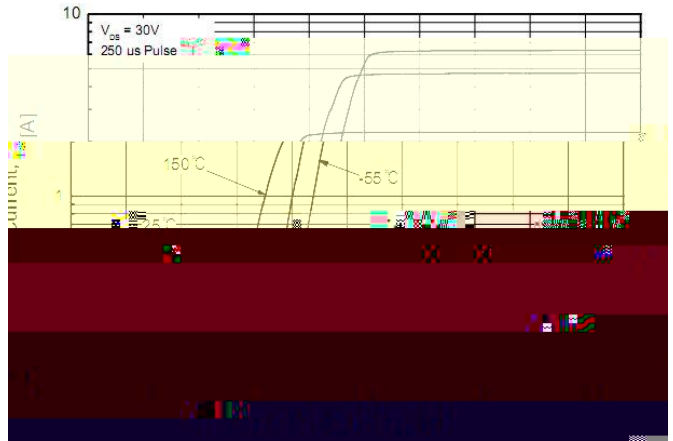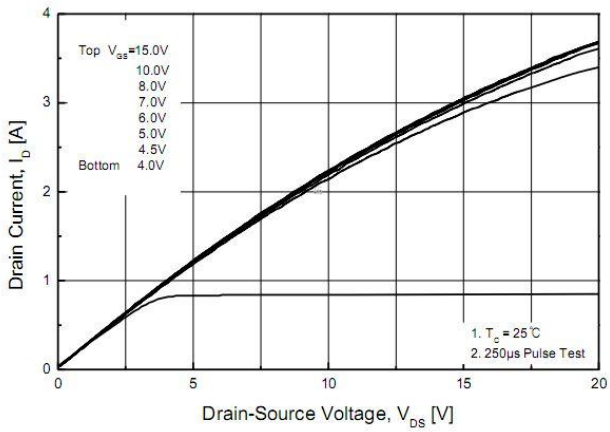

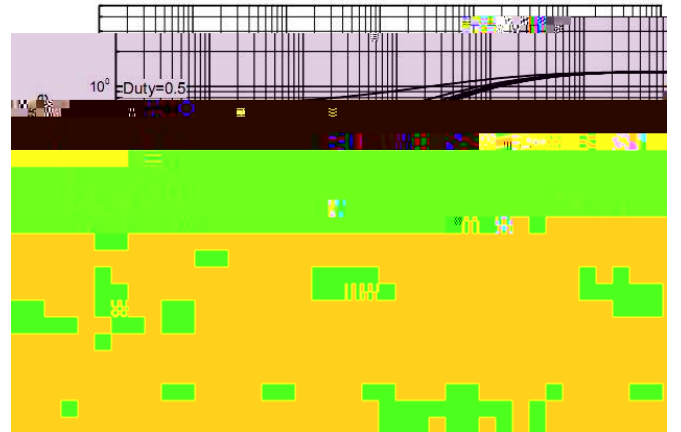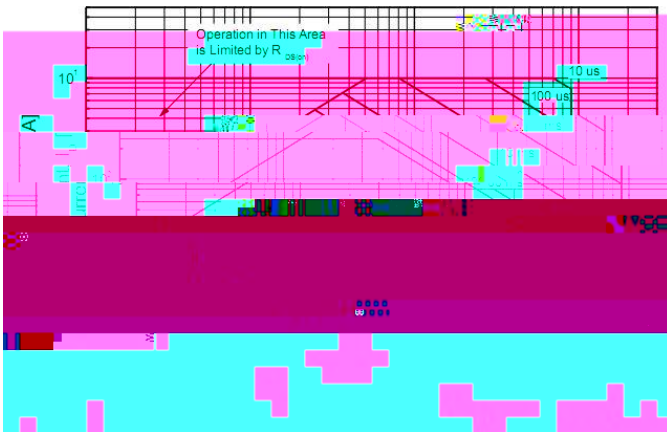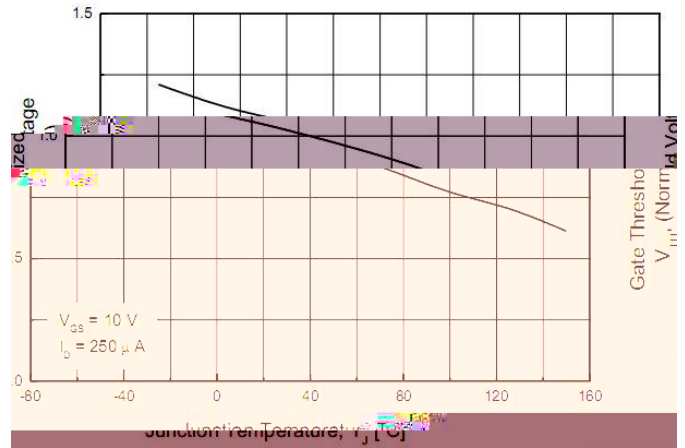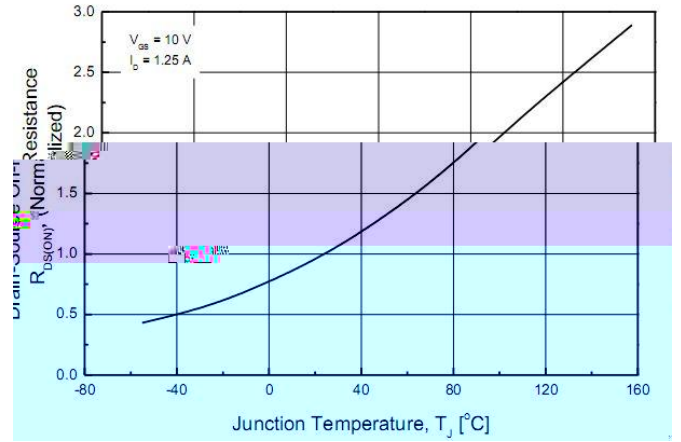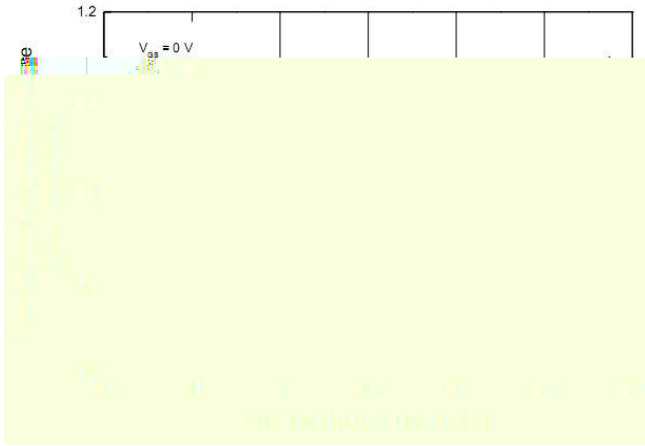

## TO-252 (D-PAK) MECHANICAL DATA

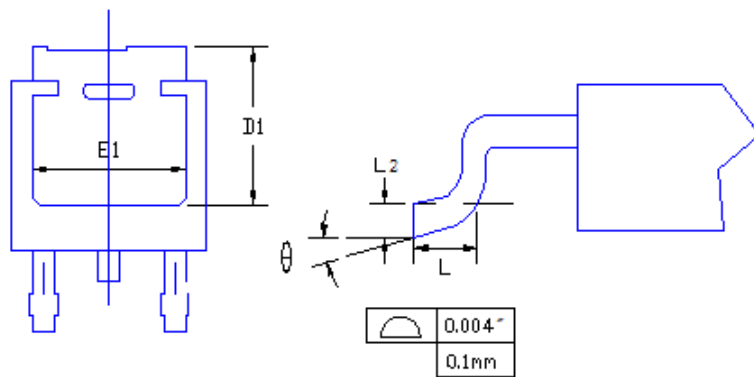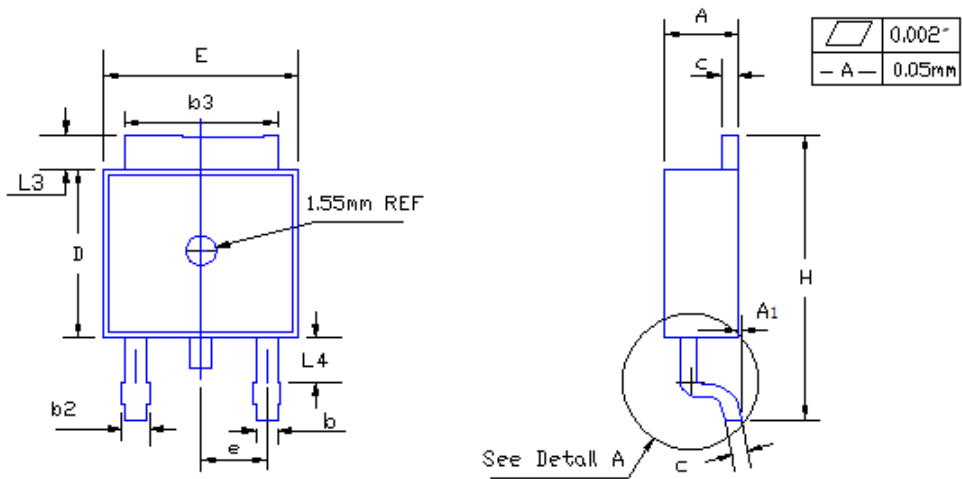

SYMBOL	MILLIMETERS	
	MIN	MAX
A	2.19	2.38
A1	—	0.13
b	0.64	0.89
b2	0.84	1.14
b3	5.21	5.46
c	0.46	0.61
D	5.97	6.22
D1	5.21	—
E	6.35	6.73
E1	4.83	—
e	2.29BSC	
H	9.65	10.41
L	1.40	1.78
L2	0.51BSC	
L3	0.89	1.27
L4	0.64	1.01
$\phi$	0	8

TO-251 (I-PAK) MECHANICAL DATA



SYMBOL	MILLIMETERS	
	MIN	MAX
A	2.19	2.38
A1	1.04	1.23
b	0.64	0.89
b1	0.84	1.14
b2	5.23	5.48
c	0.46	0.61
D	5.91	6.28
E	6.21	6.59
e	2.28 TYP	
L	8.89	9.65
L2	0.89	1.27